
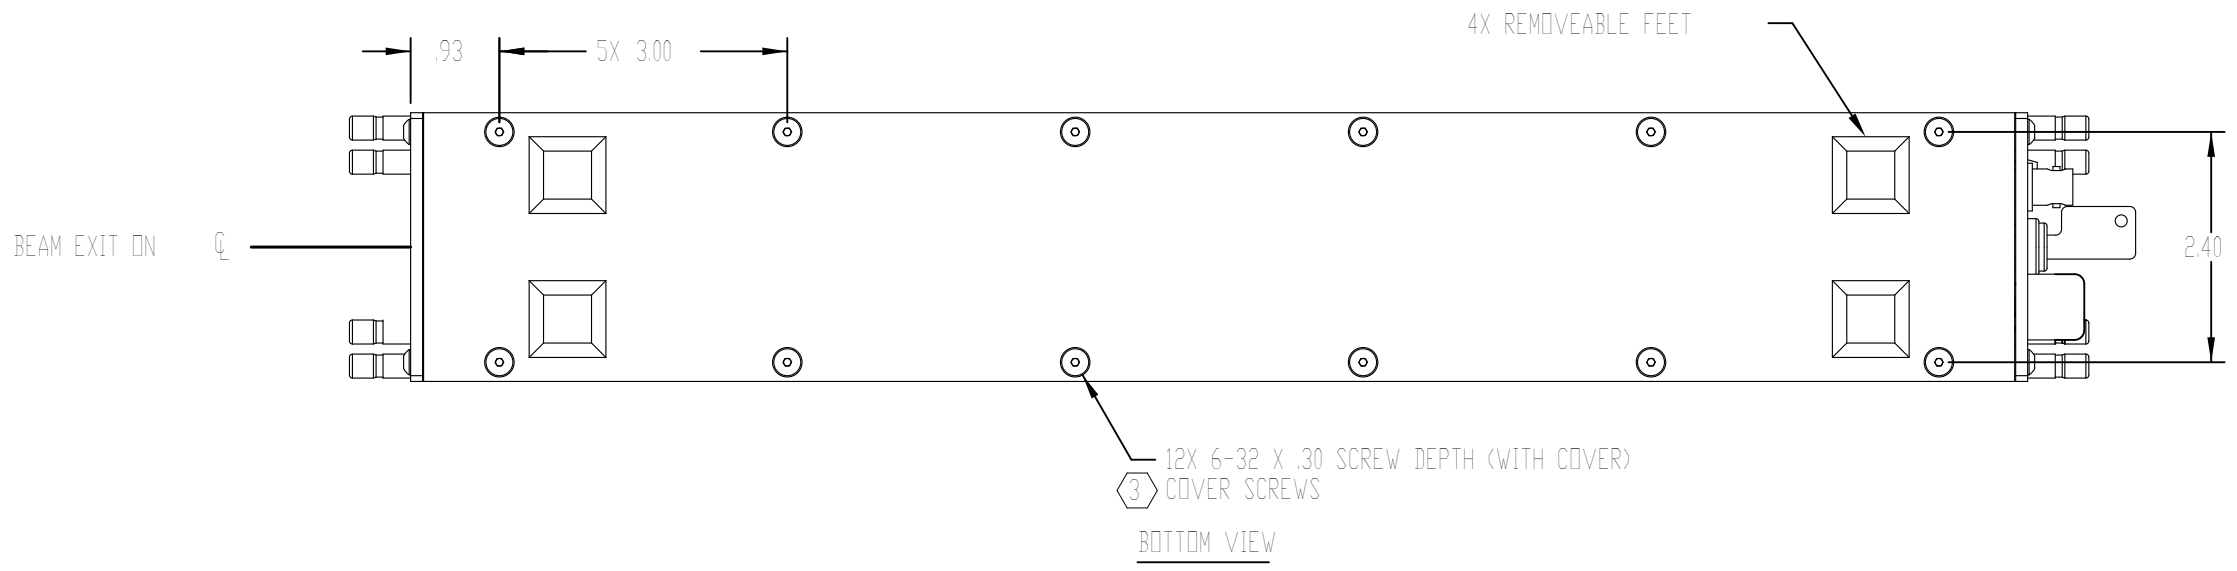
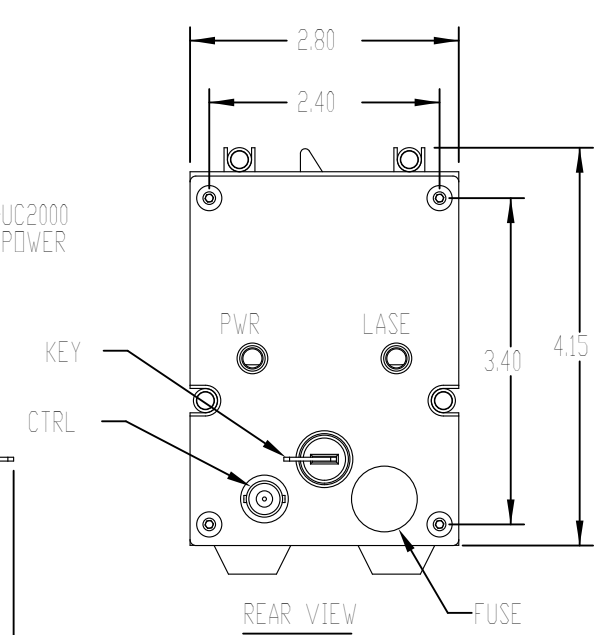
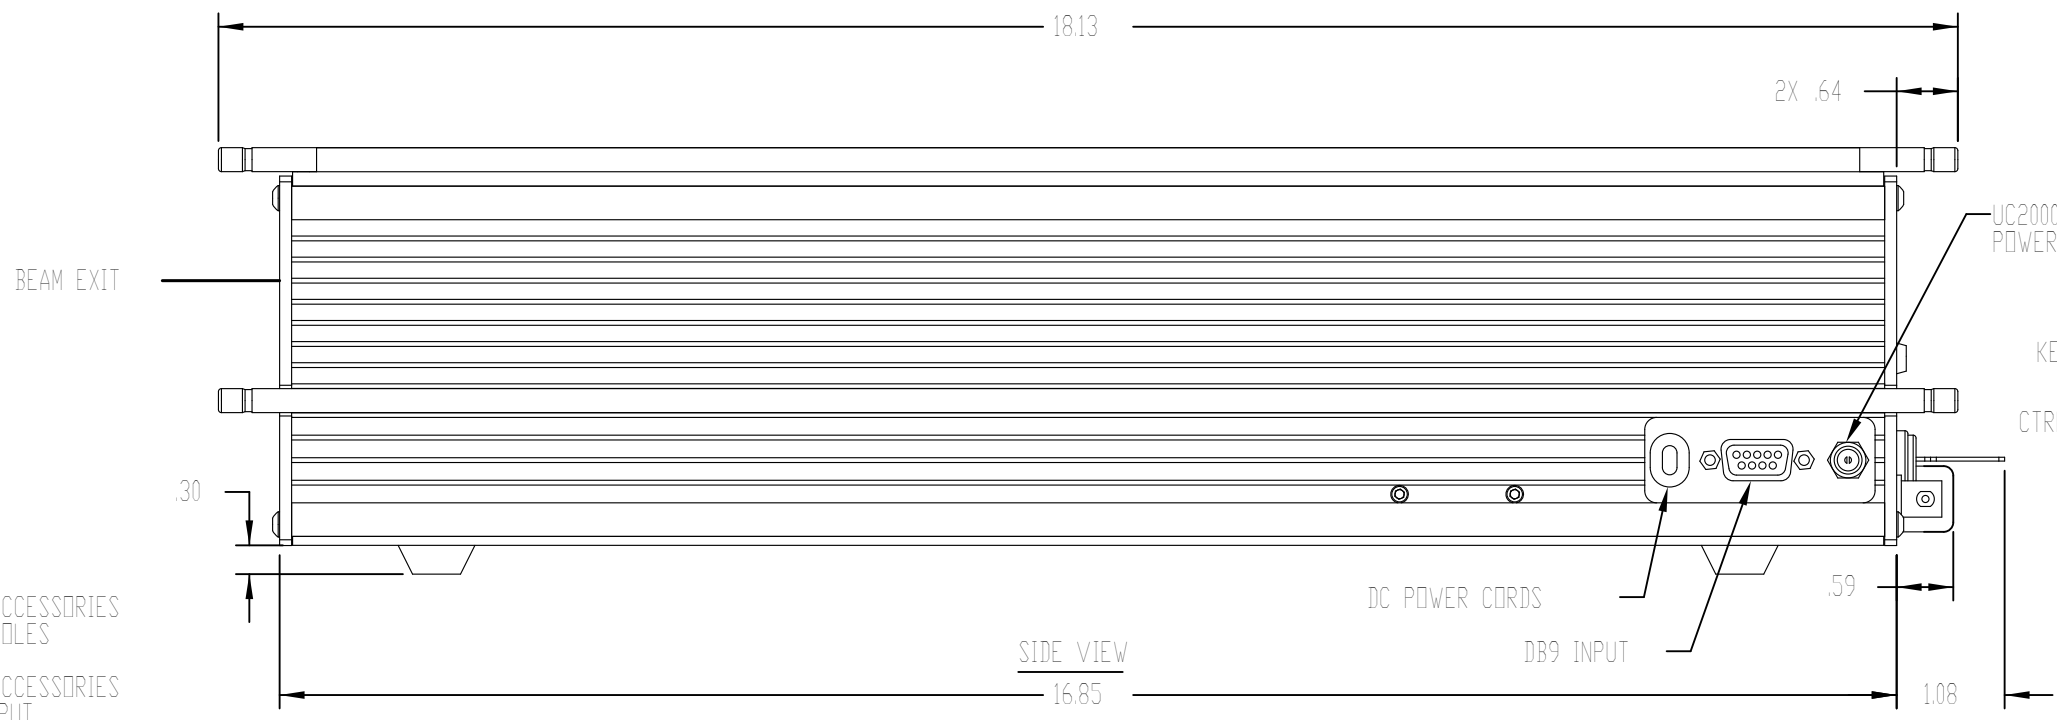


REV	ECO	DATE	DESCRIPTION	DB
G	3912	6-Aug-08	ADD BEAM EXIT Ø, CONVERT TO SOLIDWORKS	DMD
H	4107	8-Sep-09	ADD NOTE 5	DMD

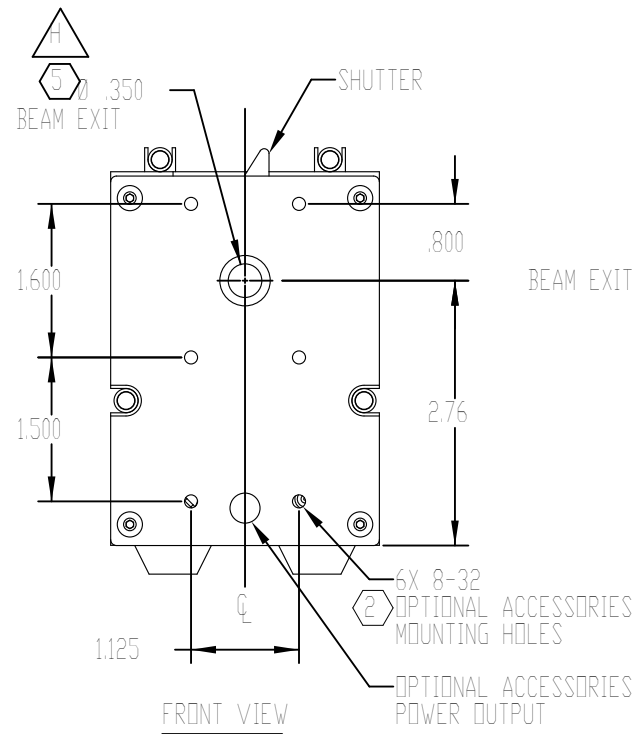


NOTES:

- DO NOT USE COVER SCREW HOLES TO SUPPORT LASER WEIGHT.
- DO NOT USE OPTIONAL ACCESSORIES MOUNTING HOLES TO MOUNT LASER.
- LASER IS MOUNTED BY REMOVING COVER SCREWS AND REPLACING WITH APPROPRIATE LENGTH SCREWS FOR YOUR MOUNTING APPLICATION. USE A MINIMUM OF FOUR SCREWS IN A SYMMETRICAL PATTERN TO PROPERLY DISTRIBUTE MOUNTING FORCES. DO NOT REMOVE COVER.
- WEIGHT: 9 LBS.
- BEAM PATH MAY NOT BE CENTERED OR PERPENDICULAR TO FACEPLATE APERTURE.

TOLERANCES UNLESS NOTED:	
.x = ± 0.1	ANGLE = ± 1°
.xx = ± 0.01	
.xxx = ± 0.005	
MATERIAL:	
FINISH:	

PROPRIETARY
THIS DRAWING IS PROPRIETARY TO
SYNRAD INC. AND SHALL NOT BE
USED OR DISCLOSED IN WHOLE
OR IN PART WITHOUT WRITTEN
PERMISSION OF SYNRAD INC.

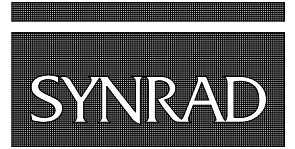

SYNRAD INC.
4600 Campus Place
Mukilteo, WA 98275
Phone: (425)349-3500
Fax: (425)349-3667

DESCRIPTION: OUTLINE & MOUNTING, 48-1			
PART NUMBER: 300-16048-01		DWG/FILE NUMBER: 300-16048-00	
SHEET 1 of 1	ENG:	DRAWN BY: A. Dexter	DATE: 19-Feb-96
UNITS: Inches	CATEGORY:	CHECKED BY:	DATE:
SIZE: B	FINISH CLASS:	APPROVED BY:	DATE: