


## f201 CO<sub>2</sub> LASER DATA SHEET

# ROBUST, RELIABLE LASER WITH MORE THAN 200 WATTS OF AVERAGE POWER FOR HIGH SPEED CUTTING AND DRILLING

The 10.2  $\mu\text{m}$  wavelength configuration expands the range of target materials to include polypropylene based films, commonly used for adhesive labels. Excellent power output and stability provides consistently high-quality results run after run. The f201 now offers a wider range of laser processing capabilities for OEMs and integrators building high-speed labeling and packaging systems.

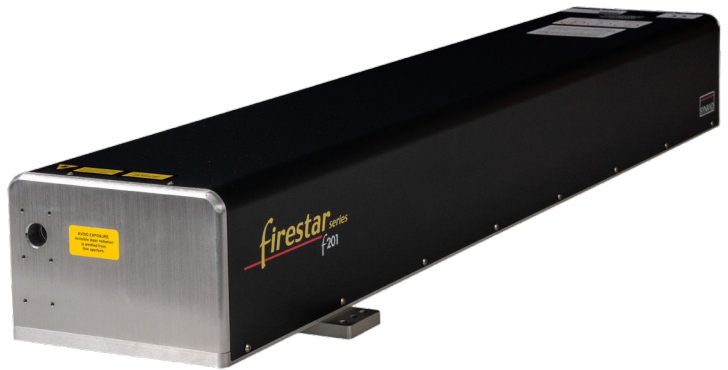

### CUTTING

The f201 excels at acrylic cutting, delivering smooth, polished edges in a single pass. Digital control, exceptional power and divergence stability enable detailed cuts.



### SCORING

200 Watts average laser power delivers precise scoring at high speed, perfect for flexible packaging production lines.



### TEXTILES

Cut and seal edges of the newest high tech fabrics with the f201. Add strategically placed surface treatments for breathe ability, ventilation, or heat retention, all with the same system.

## ENGINEERED WITH EXCELLENT POWER AND DIVERGENCE STABILITY FOR DEMANDING INDUSTRIAL ENVIRONMENTS

- Excellent power stability for kiss cutting multi-layer material, scoring and perforating flexible packaging material, and thin film welding.
- Fully integrated laser/RF design minimizes size and weight; perfect for mounting on robotic arms, high speed cutting systems, or full integration onto flatbed cutting systems
- Simple interfaces to water-cooling and control signals, with three point Metric/ English mounting system minimizes integration time for OEMs and system integrators
- Standard gas purge to maintain internal optic integrity even in harsh environments, and water cooling for higher electronic component efficiency and longer lifetime

## f201 CO<sub>2</sub> LASER SPECIFICATIONS


Output Specifications		
Wavelength	10.2 μm	10.6 μm
Output Power <sup>1</sup>	> 200 W	
Power Stability (typical, after 3 min.) <sup>2</sup>	± 5%	
Power Stability (cold start) <sup>3</sup>	± 7%	
Beam Quality (M <sup>2</sup> )	< 1.3	
Beam Diameter <sup>3</sup>	4.5 mm + 0.1 mm	
Divergence (full angle)	4.0 mrad ± 0.2 mrad	
Ellipticity	< 1.3	
Polarization	Linear (Horizontal)	
Rise Time	< 150 μs	
Operating Frequency	0 - 100 kHz	
Power Supply		
DC Voltage Input	96 VDC	
Maximum Current	36 A	
Cooling		
Maximum Heat Load	4000 W	
Coolant Temperature	18 - 22° C (water)	
Minimum Flow Rate	2.0 GPM, < 60 PSI	
Environmental		
Operating Ambient Temperatures	15 - 40° C	
Maximum Humidity	95%, non-condensing	
Physical		
Dimensions (LxWxH) mm (inches)	1229 x 279 x 165 (48.4 x 11.0 x 6.5)	
Weight kg (lbs.)	43.5 kg (96 lbs.)	

1 - Power level guaranteed for 1 year from date of shipment, regardless of operation hours, within recommended coolant flow rate and temperature range.

2 - Measured from cold start as  $\pm(P_{\max} - P_{\min}) / (P_{\max} + P_{\min})$

3 - Measured 1/e<sup>2</sup> diameter at laser output. Please see the manual for the full list of specifications and associated measurement conditions.

Please see the manual for the full list of specifications and associated measurement conditions.




# f201 CO<sub>2</sub> LASER - OUTLINE & MOUNTING ILLUSTRATIONS

Dimensions are in mm (inches)

**NOTES:**

- ① THIS MOUNTING HOLE PATTERN IS USED WHEN BOTTOM ACCESS MOUNTING IS DESIRED WITH M8 FASTENERS.
- ② THIS MOUNTING HOLE PATTERN IS USED WHEN TOP ACCESS MOUNTING IS DESIRED, STANDARD OR METRIC FASTENERS.
- ③ THIS MOUNTING HOLE PATTERN IS USED WHEN BOTTOM ACCESS MOUNTING IS DESIRED WITH 5/16-18 FASTENERS.
- ④ BEAM PATH MAY NOT BE CENTERED OR PERPENDICULAR TO FACEPLATE APERTURE.

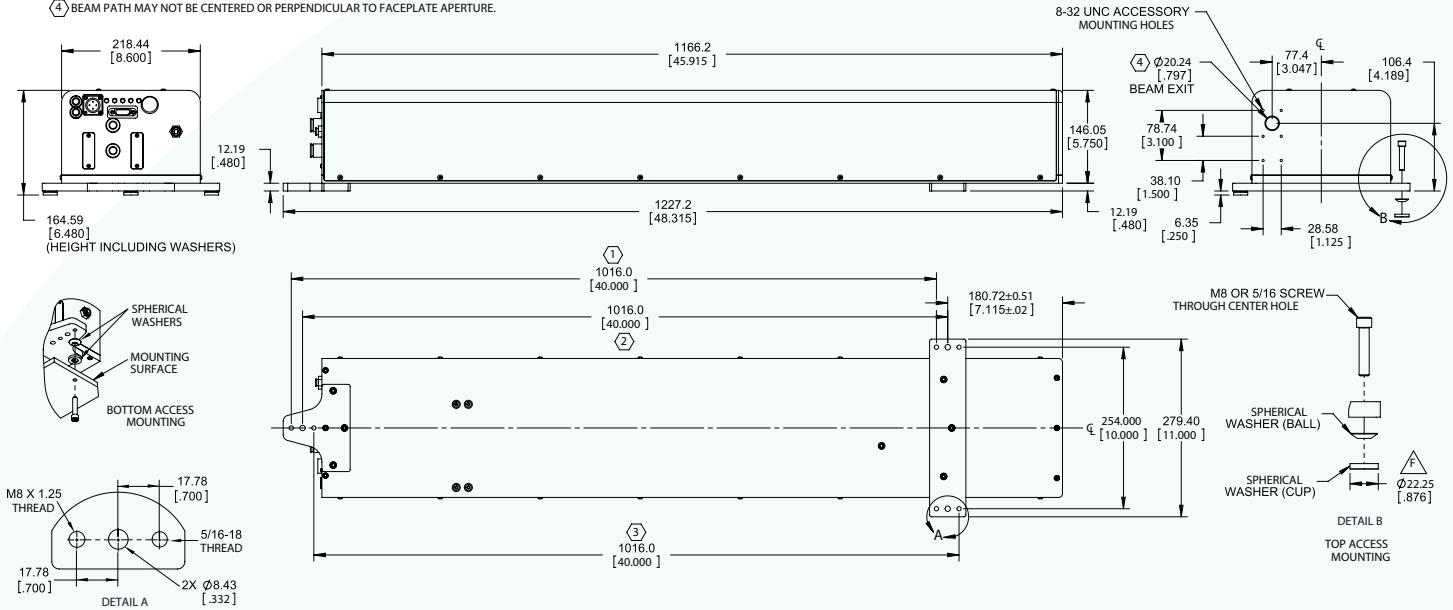

## CONTACT US

**Americas, Asia Pacific**

Novanta Headquarters  
Bedford, USA  
P +1-781-266-5700

Photonics@Novanta.com

**Europe, Middle East, Africa**

Novanta Europe GmbH  
Wackersdorf, Germany  
P +49 9431 7984-0

Milan, Italy  
P +39-039-793-710

Photonics@Novanta.com

**China**

Novanta Sales & Service Office  
Shenzhen, China  
P +86-755-8280-5395

Suzhou, China  
P +86-512-6283-7080

Photonics.China@Novanta.com

**Japan**

Novanta Service & Sales Office  
Tokyo, Japan  
P +81-3-5753-2460

Photonics.Japan@Novanta.com