

## vi SERIES CO<sub>2</sub> LASER DATA SHEET


# INDUSTRY LEADING LASER WITH MORE THAN 30/40 W OF AVERAGE POWER FOR MARKING, ENGRAVING AND ABLATING

Next gen high performance CO<sub>2</sub> laser with customer-inspired features. The vi40 provides real-time temperature measurements of the laser's interior transmitted on user output line intervals of 250 ms for operating conditions feedback. The vi30+ includes an extended 2-year standard warranty period through a network of Novanta Service Centers.

### RECOMMENDED APPLICATIONS




Small footprint, light weight, and high resolution imagery engineered to fit a wide variety of automated manufacturing systems.

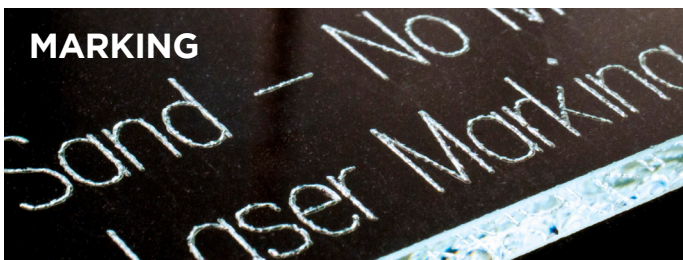

Powerful, accurate laser output that can be used on a wide variety of materials.



Stable operation over a wide range of settings enables precise control of material removal, allowing consistent ablation depth or detailed 3D engraving.

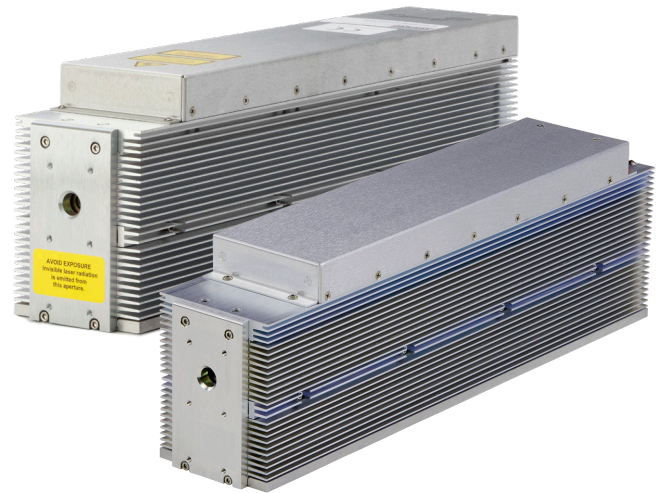

### ENGINEERED FOR SEAMLESS INTEGRATION INTO HIGH-SPEED INDUSTRIAL EQUIPMENT

- Excellent thermal management delivers stable, high-power output and crisp beam quality for precise processing
- Fast rise/fall times enable high speed engraving, marking, and coding applications for high-volume manufacturers and processors
- Real-time condition monitoring (vi40) with an industry first temperature broadcast feature to avoid unexpected downtime and costly system repairs
- Multiple cooling options (vi30+) for greater integration flexibility
- Large dynamic range for marking and coding a wide variety of materials with stable power output, even at low duty cycles
- Multiple wavelength options (vi30+) to accommodate a wide range of material processing
- Uniform results from machine start through laser warm-up with excellent power stability
- Compact and lightweight, easily fits into tight spaces and onto weight sensitive systems

## vi SERIES CO<sub>2</sub> LASER SPECIFICATIONS


Output Specifications	vi40	vi30+	
Wavelength	10.6 μm	9.3 μm	10.2 μm 10.6 μm
Output Power <sup>1</sup>	> 40 W	> 20 W	> 25 W > 30 W
Power Stability (typical, after 3 min.)	± 3%	± 5%	± 3%
Power Stability (cold start) <sup>2</sup>	± 5%	± 7%	± 5%
Beam Quality (M <sup>2</sup> )	< 1.2	< 1.2	
Beam Diameter <sup>3</sup>	2.5 mm ± 0.5 mm	2.5 mm ± 0.5 mm	
Divergence (full angle)	< 7.0 mrad	< 7.0 mrad	
Ellipticity	< 1.2	< 1.2	
Polarization	Linear (Horizontal)	Linear (Horizontal)	
Rise Time	< 100 μs	< 100 μs	
Operating Frequency	0 - 100 kHz	0 - 100 kHz	
<b>Power Supply</b>			
DC Voltage Input	48 VDC	48 VDC	
Maximum Current	15 A	10 A	
<b>Cooling</b>			
Maximum Heat Load	680 W	400 W	
Coolant Temperature	< 40° C (air)	< 60° C	
Minimum Flow Rate	190 CFM, 2 required (air)	140 CFM, 2 required (air) 4.0 GPM, < 60 PSI (water)	
<b>Environmental</b>			
Operating Ambient Temperatures	15 - 45° C	15 - 40° C	
Maximum Humidity	95%, non-condensing	95%, non-condensing	
<b>Physical</b>			
OEM Air Cooled Dimensions (LxWxH) mm (inches)	427 x 89 x 139 (16.8 x 3.5 x 5.5)	427 x 89 x 139 (16.8 x 3.5 x 5.5)	
Weight kg (lbs.)	6.7 kg (14.8 lbs.)	6.5 kg (14.3 lbs.)	

1 - Power level guaranteed for 1 year from date of shipment, regardless of operation hours, within recommended coolant flow rate and temperature range.

2 - Measured from cold start as  $\pm(P_{\max} - P_{\min}) / (P_{\max} + P_{\min})$

3 - Measured 1/e<sup>2</sup> diameter at laser output.


Please see the manual for the full list of specifications and associated measurement conditions.




# vi SERIES CO<sub>2</sub> LASER - OUTLINE & MOUNTING ILLUSTRATIONS

Dimensions are in mm (inches)

## vi40

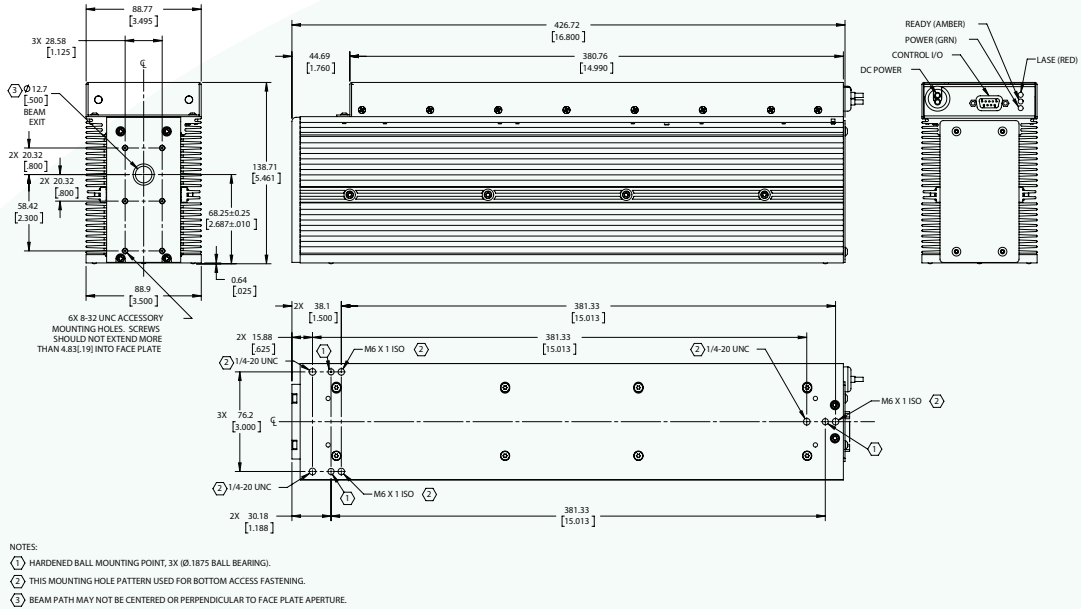

## vi30+

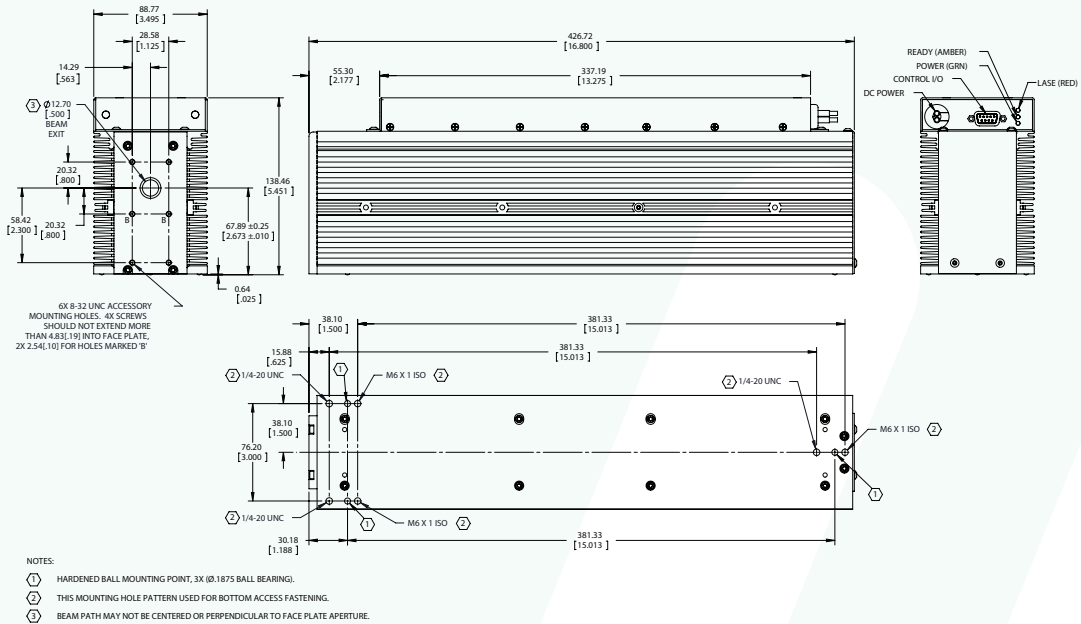

## CONTACT US

### Americas, Asia Pacific

Novanta Headquarters  
 Bedford, USA  
 P +1-781-266-5700

Photonics@Novanta.com

### Europe, Middle East, Africa

Novanta Europe GmbH  
 Wackersdorf, Germany  
 P +49 9431 7984-0

Milan, Italy  
 P +39-039-793-710

Photonics@Novanta.com

### China

Novanta Sales & Service Office  
 Shenzhen, China  
 P +86-755-8280-5395

Suzhou, China  
 P +86-512-6283-7080

Photonics.China@Novanta.com

### Japan

Novanta Service & Sales Office  
 Tokyo, Japan  
 P +81-3-5753-2460

Photonics.Japan@Novanta.com