

Analog vs. Digital Galvanometer Technology - An Introduction

Authors: Matthew Tedford, Jeremy Berke, Ali Golabchi, Malte Hemmerich

Abstract

When designing a new laser application with beam deflection units, most engineers will choose the optical design (mirror size, coatings, mirror material) with great care. This makes sense as the effective focal length, spot size and the power handling the system are all crucial. However, choosing the right galvanometer technology is just as important for the overall achievable performance of the application. In this white paper, we discuss the advantages and disadvantages of analog galvanometers and servo units and, in particular, hybrid solutions using digital servo technology with analog galvanometers. Influences of the respective technology on achievable speeds, accuracies and integration hurdles are examined.

Galvanometers – Digital vs. Analog

Galvanometers (galvos) at their heart, are limited rotation DC motors with a precision position detector (PD) at one end and, in this context, a mirror at the other. While the size and construction of the motor may vary, and will impact the performance of the galvo, the position detector is the key component of the device. Over the years, galvos have used capacitive sensors, optical sensors, and encoders to determine the position of the rotor shaft and the opposing mirror. The most common PD's in the modern era are optical sensors and encoders which will be the two feedback mechanisms focused on for this section of the paper.

Optical sensors for position detectors have been used in galvos since the early 2000's. See Figure 1 for example. This PD is commonly found in [Novanta's Cambridge Technology 62xxK and 83xxK](#) series of galvanometers. The rotor shaft of the motor has the butterfly attached to it and as the rotor turns, the butterfly covers and uncovers parts of the photocells. The photocells in turn generate two currents on the scale of microamps that are sent back to the servo board which then converts the current to a voltage to determine the angular position of the rotor. This, coupled with the rest of the control loop, ensures precise and stable operation of the galvo while following the commands provided by the servo board.

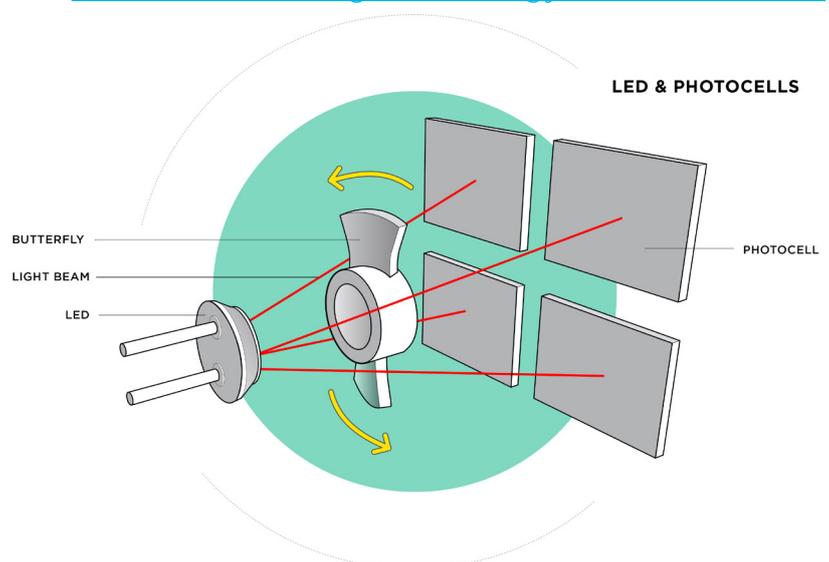


Figure 1: Example of optical detector

Galvanometers – Digital vs. Analog

With this design, due to the low inertia of the butterfly, the PD typically isn't a limitation when it comes to selecting a mirror size. It has been used with mirror apertures as small as 3mm and as large as 100mm with overwhelmingly positive results. While there are many other positive aspects to this design, there are two main drawbacks. The first is that because the PD returns small, microamp currents it can be susceptible to electromagnetic interference (EMI) if the cable is not shielded correctly. Given that multi-amp currents can be present in the motor leads of the galvo, poor shielding can cause noisy signals to outright failure of the unit. Additionally, because the 4 photocells are discrete components, as the galvo warms up through either self-heating or environmental conditions, their movement can introduce unwanted scale drifts into the system due to thermal expansion. While both issues are compensated for, this is still something to be aware of.

In contrast digital PDs, like the one used in Novanta's Cambridge Technology LIGHTNING II galvos, use an encoder disk that is not susceptible to the same scale drifts and EMI concerns. This is due to the design of the PD. Because the encoder is a scale disk, the read head ignores the thermal expansion and contraction of the disk because it changes in a uniform manner. Also, the sine and cosine signals that the encoders generate are digitalized in the galvo, so only digital feedback signals are sent to the servo, which greatly reduces the sensitivity to noise. With this design, due to inertia of the encoder, mirror apertures will range from as small as 14mm to as large as 50mm and still provide the utmost performance.

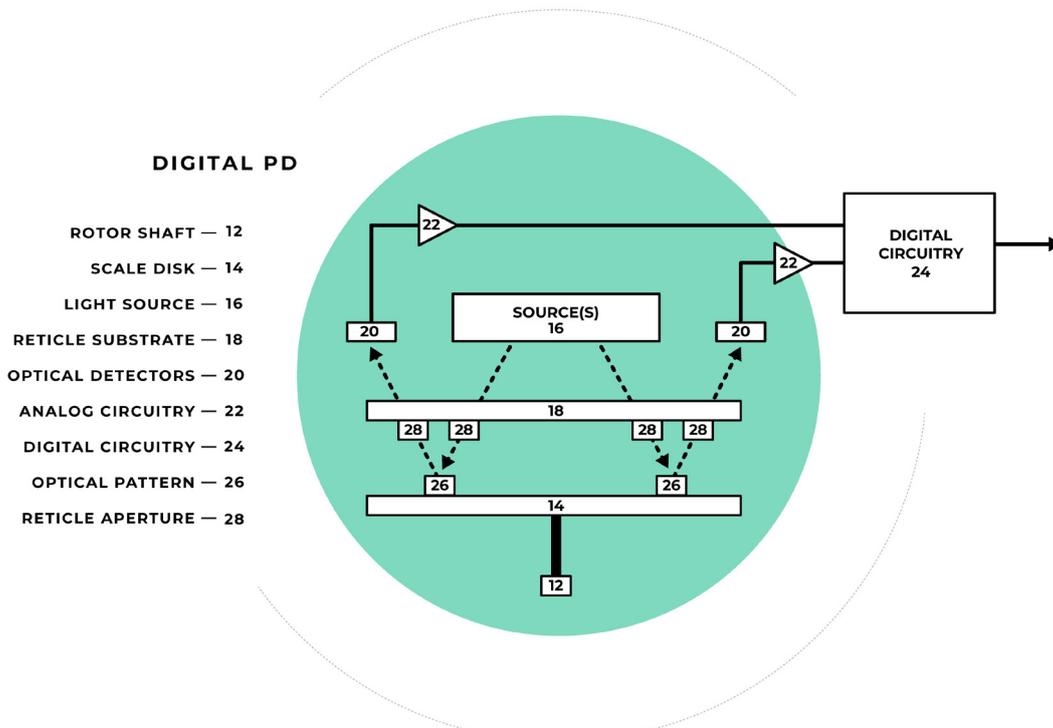


Figure 2: Example of Digital Encoder

Servos – Analog vs. Digital

The control loop in analog servos use a large number of variable resistors to tune the galvo performance. This fact requires an individual tuning process for each servo-galvo pair which makes any tuning changes or replacements of individual components outside of the factory very difficult. Also, because the system uses potentiometers to set the tuning terms, there isn't a way to pass the values up to a system control to do predictive control.

Digital based servos on the other hand are flexible and can provide higher accuracy. Because the control loop for these servos exists in firmware, they can be changed and adapted at any point in their lifespan without the need of additional hardware. Even remote adaptation of an existing digital servo to a new galvo, or vice-versa, can be achieved. While analog servos typically uses position, velocity, and current feedback signals to control the galvo, digital servos can also use feedforward, modeling, and much more to allow for a higher level of control and even pass the values to the upper-level system controller for use in predictive control like [Novanta's ScanPack](#). ScanPack prioritizes accuracy and quality based upon the needs of the application. Vectors, circles, points, and spirals can all be customized to a high degree for peak performance.

Hybrid System – Analog Galvo with Digital Servo

There is a wide range of applications that do not require the highest drift-performance and accuracy that digital galvos can provide but would benefit from the re-tunability and flexibility of a digital servo. Thus, it is a rather common desire to combine the advantages of the cost effective and rugged design of analog galvos with the perks that come with a digital servo. If a standard 62xxK/83xxK analog galvo meets the performance needs of an application and the application values the flexibility offered by a digital servo, then Novanta's soon-to-be-released VERSIA scan head or a component-based solution with a digital servo can be the best answer. As outlined in the previous section talking about servos, there is a lot of value that a digital servo can bring to an application. A digital servo gives an extra level of field serviceability, flexibility, and control to the analog galvos through ScanPack.

One of these advantages is the ability to decouple the servo from the galvo. This means that when it comes to field service, a technician may only need to replace a galvo or servo instead of the entire set and re-tuning the system can be performed in the field, whereas the analog system would have to be returned to the factory. This greatly reduces the material cost of a repair and reduces the time on site for a technician or the overall time it can take to repair a system.

Another advantage of a digital servo is the level of flexibility it provides during initial integration. As mentioned previously a digital servo potentially allows a customer to decouple the serial numbers, thus increasing the late-stage configurability of a system. As an example, let's assume there is a production line that manufactures 8 and 10mm marking systems where the servos are in a machine enclosure. With an analog galvo and servo, care needs to be taken to ensure that the galvo-servo pair never gets separated. This may limit the way material can flow through a production line. Whereas with a digital servo, the control cabinet could be built on one line, and the scan heads could be built on another, and it wouldn't be until they were being built into a final machine that they'd be paired and tuned.

Also, by pairing the analog galvos with the digital servos, the tuning terms move from the analog world of potentiometers to the digital realm. This means that the values of the tuning terms can be passed up to the controller of the system, such as Novanta's ScanMaster Controller, and be used for predictive control which allows an application to move to the next level of accuracy and quality for an application. The job creator can now define the speed at which the galvos enter and exit a vector or corner, eliminating laser pulse stack up. The developer also gets greater control over circles, spirals, and points.

Hybrid System - Analog Galvo with Digital Servo

To provide a more specific example on the predictive control ScanPack provides, most servos tend to use a state feedback control scheme, which can impact the performance of marking small circles if the system bandwidth isn't high enough. see Figure 3 . The tear drop shape caused by the feedback control and low bandwidth can be corrected by increasing the bandwidth (i.e., faster tune), but doing so would increase the noise of the system.

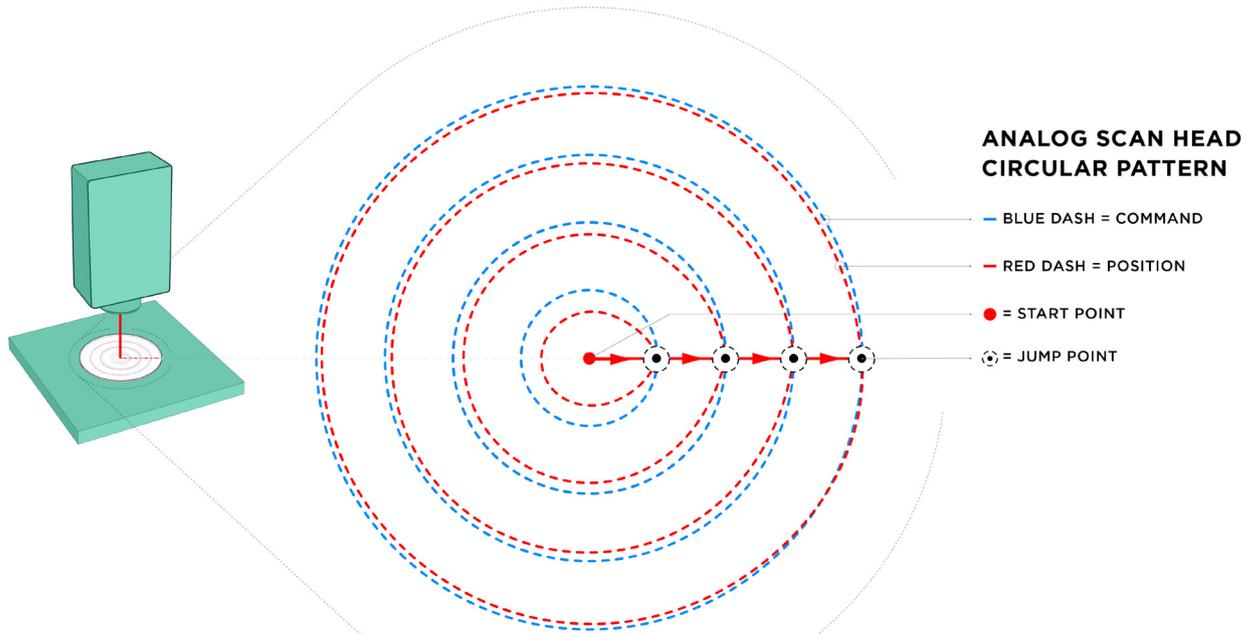


Figure 3: Example of circles with low bandwidth

A better way to correct for this could be done by using the advanced features for circles that ScanPack provides. By controlling the velocity the galvos enter and exit a circle along with the amount of lead in and lead out, a perfect circle can be achieved, see Figure 4. While this may lead to smaller circles, the error is constant and can easily be compensated for. This type of control can only be done if the tuning terms used in the servo are known.

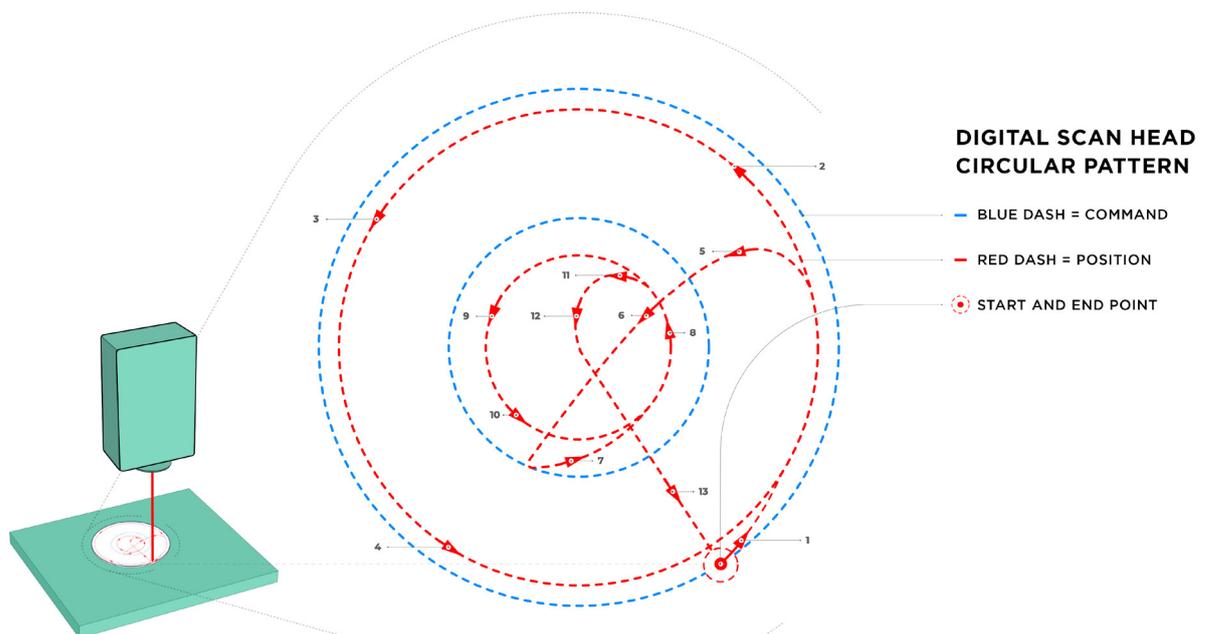


Figure 4: Using Predictive Control

Conclusion

In summary, all three combinations of analog and digital galvos and servos offer advantages depending upon the needs of an application. Those advantages have been summarized for easy comparison in Table 1.

	Fully Analog	Hybrid	Fully Digital
Novanta Products	62xxK/83xxK with 67x driver MOVIA Scan Head	62xxK/83xxK with digital driver VERSIA Scan Head	LIGHTNING II
Price	\$	\$\$	\$\$\$
Field Serviceability	✗	✓	✗
Accuracy	✓	✓	✓ ✓ ✓
Available Mirror Size Range	3mm to 50mm	3mm to 50mm	14mm to 50mm
Drift	✓	✓ ✓	✓ ✓ ✓
Predictive Control	✗	✓	✓
Protection from OBS components	Low	High	Medium/High

Table 1

Novanta Benefits

Novanta is uniquely positioned to solve even the most complex challenges for OEMs, system integrators, and end-use customers seeking to advance their manufacturing processes with high precision laser systems. With some of the most well-known brands in the industry and in-country application and service support, Novanta delivers reliable, precise, and durable components and sub-systems.

Our Applications Testing Labs offer application and proof-of-concept testing to OEMs, system integrators, material manufacturers, processors, and end-users of automated machinery. Novanta Application Engineers are laser processing experts, and understand the parameters that will ensure successful, efficient laser processing. Using laser and beam steering equipment from well-known Novanta brands, our Application Engineers will determine the key product parameters and processing know-how to achieve the desired results.

CONTACT US

E photonics@novanta.com | photonics.china@novanta.com | photonics.japan@novanta.com

W novantaphotonics.com